




**Maintainer**

**1115 CRANE**




# specifications

## short tower

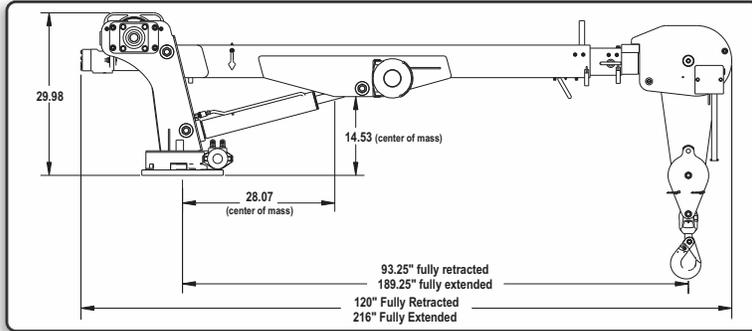

## tall tower

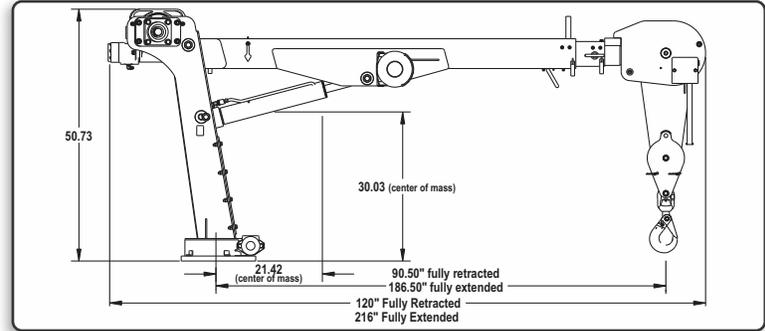

## features:


- Tall tower crane
- Worm gear winch - 30 fpm
- 2-Part line (single part capable)
- Tall tower weight - 900 lbs.
- Total operational range - 89° (-12° to 77°)
- 20" x 18" mounting space required/15"x8" bolt pattern/ (4) 2/4" gr8 bolts
- Hydraulic requirements 7-9 GPM @2600 psi
- Anti-two block
- 70 ft. of 1/4" dia. wire rope
- 570° of rotation
- 11' hydraulic extension with 4' manual extension
- Single sheave design (low profile)
- Closed center/Load sensing hydraulic system
- OSHA 1810.180/ANSI B30.5 compliant
- Wireless remote control standard
- Advanced Crane Control - standard



## ratings:

### 1115 CRANE CAPACITY CHART | 11,000 FT\*LB CRANE RATING

MAX SINGLE LINE CAPACITY IS 1940 LBS. FOR GREATER LOADS USE 2 PART LINE  
 DEDUCT FROM CAPACITIES THE WEIGHTS OF LOAD HANDLING DEVICES  
 OUTRIGGERS MUST BE EXTENDED AND DOWN

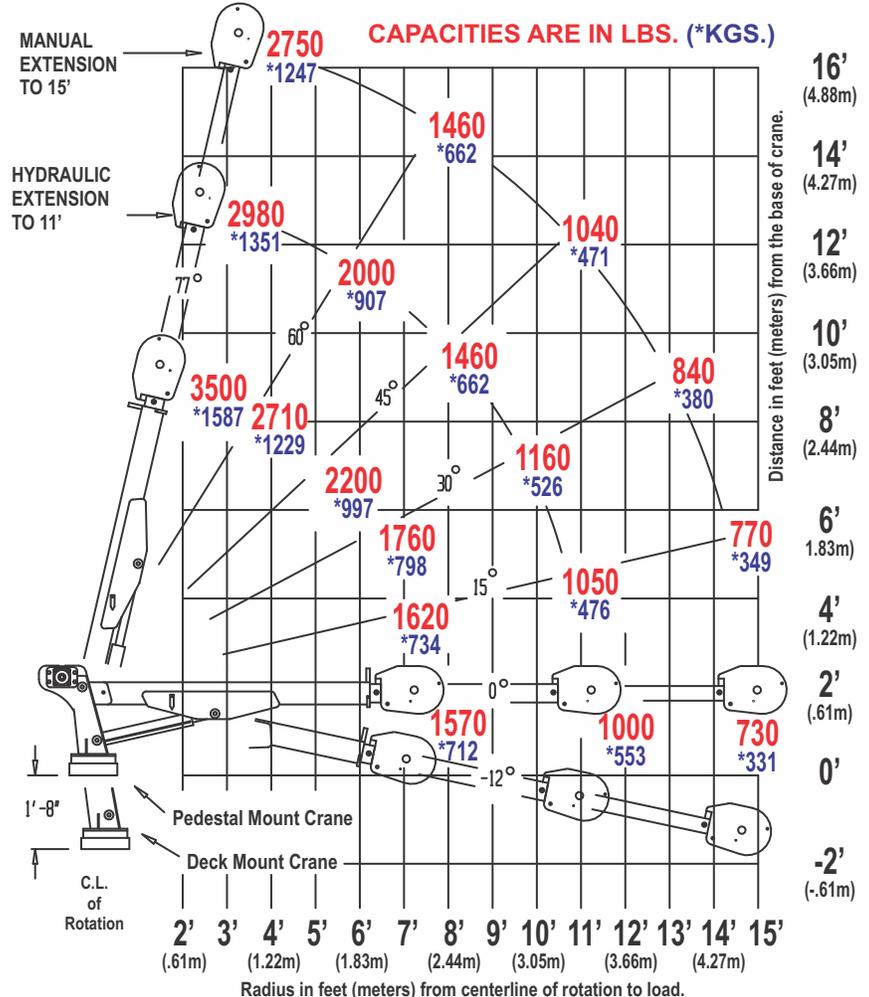

## options:

- Short tower crane - 865 lbs.
- Open center hydraulic system
- LED flood light on boom tip