

H8530 CRANE

AVAILABLE IN SHORT AND TALL TOWER CONFIGURATIONS



MODEL	TYPE	Crane Rating (ft*lb)	REACH	Max Lift (lbs)	BOOM ELEVATION
H8530	Hydraulic	52,500	30'	8,500	-13° +78°

Maintainer

800-831-8588 | www.maintainer.com


specifications



- 2390 lbs. (1084 KGS)
- 22" x 22" Mounting Space Required
- Mounting requires (8) 7/8-9 (GRD-8) bolts
- Hydraulic Requirements: 10-12 GPM@3000 PSI
- Minimum recommended GVW 22,000#

H8530 CRANE CAPACITY CHART | 52,500 FT*LB CRANE RATING

Hydraulic
Extension
To 30'

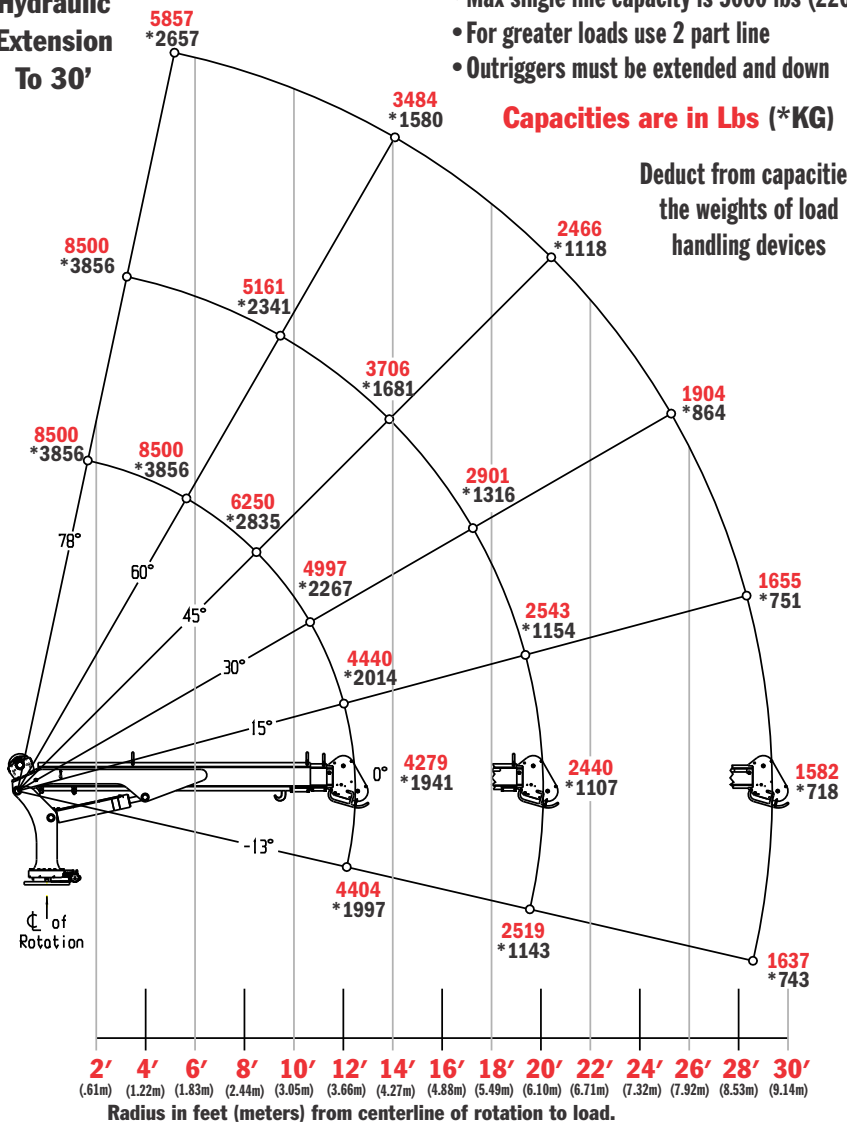

features

- 8,500 lb. max. capacity
- 52,500 ft-lb capacity
- 30' hydraulic reach
- Advanced Crane Control 2.0 - standard
- Boom-Mounted planetary winch
- Dual part line standard - single part capable
- Total operational range 91° (-13 to +78)
- Low profile double sheave design
- Anti-Two block reel located on left side
- User-friendly load block storage
- 140' of 3/8" diameter wire rope
- 615° of rotation
- Hexagonal boom
- Wireless remote - standard
- Tall and short tower configurations
- Closed-center/load sensing hydraulic system (open center optional)
- OSHA 1910.180/ANSI B30.5 compliant

