

# Mechanics Truck

# MAINTAINER MTS-2 SERVICE BODIES

## Technical Specifications



<b>SPECIFICATIONS:</b>	<b>11-FT (84 CA)</b>	<b>14-FT (120 CA)</b>
BODY WIDTH	96"	96"
SIDEPACK HEIGHT	62"	62"
SIDEPACK DEPTH	23"	23"
CARGO DECK WIDTH	49"	49"
STEP BUMPER DEPTH	12"	12"
WORKBENCH BUMPER DEPTH	20" or 26"	20" or 26"
TAILGATE HEIGHT	10"	10"
STORAGE CAPACITY (body w/o crane, 26" workbench w/bar storage, )	170.5 cu. ft.	226 cu. ft.
STORAGE CAPACITY (body w/ ST-crane (7" drop), 26" workbench w/bar storage)	163.8 cu. ft.	219.3 cu. ft.
STORAGE CAPACITY (body w/ TT-crane, 26" workbench w/bar storage)	156.3 cu. ft.	211.8 cu. ft.
ANGLE OF DEPARTURE (with step bumper)	18.7°	18.7°
<b>Door Opening Dimensions</b>	<b>11'</b>	<b>14'</b>
SS1 - LH 1ST VERTICAL	15"W x 55"H	15"W x 55" H
SS2 - LH 2ND VERTICAL	30"W x 55"H	30"W x 55" H
SS3 - LH 3RD VERTICAL	N/A	30"W x 55"H
SS4 - LH 4TH HORIZONTAL	49"W x 25"H	49"W x 25"H
SS5 LH 5TH VERTICAL	19"W x 55"H	19"W x 55" H
CS1 RH 1ST VERTICAL	30"W x 55"H	30"W x 55"H
CS2 - RH 2ND VERTICAL	14"W x 55"H	30"W x 55"H
CS3 - RH 3RD VERTICAL	N/A	14"W x 55"H
CS4 - RH 4TH HORIZONTAL (Body without crane)	49"W x 25"H	49"W x 25"H
CS4 - RH 4TH HORIZONTAL (Body with TT crane)	42"W x 25"H	42"W x 25"H
CS5 RH 5TH VERTICAL (Body without crane)	19"W x 55"H	19"W x 55"H
CS5 RH 5TH VERTICAL (Body with TT crane)	19"W x 20"H	19"W x 20"H



# MAINTAINER MTS-2 SERVICE BODIES


## Standard MTS-2 Body Features:

- A60 Galvannealed steel compartments (12-GA, 11-GA, top & backs stamped deck plate)
- Ribbed compartment floor for (44% less deflection) additional strength
- Recessed fuel fills
- 3/16" single piece aluminum recessed doors w/stainless steel hinges (greasable)
- Aluminum drip rail above compartment doors, metal backed push-on weather stripping
- Gas spring door holder, D-ring stainless steel compression door latches
- 3-pt rear center deck access, with large handles
- Adjustable Shelving Package (250 lbs. capacity)
- I.C.C. Safety kit (2.5 lb. ABC fire extinguisher & hazard reflectors)
- LED marker and tail lights
- 97db back up alarm
- PPG etched-primed, urethane-primed, urethane-painted
- Undercoating
- PPG protective spray (compartment fronts, rear bumper face and surface)
- Interior PPG splatter coating



## Body Substructure:

The frame is constructed of 8" channel main sill with 4" cross-members and structural tubing. Cross members are located on maximum of 12" centers. The bed floor is constructed of 1/8" steel deck plate.

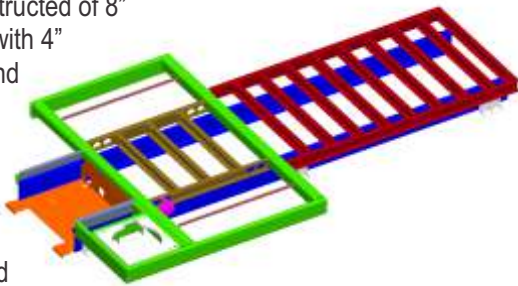

## Electrical System:

The electrical system consists of a central power distribution switch box in the SS front compartment (nearest the operator as they exit the chassis). The wiring harnesses feature braided loom protective covering that is heat and cut resistant, and Deutsch sealed connectors. The wire is color coded per specific function for easy identification.



## Options:


- Drawers (DualLock™ - aluminum), parts bins, "J"-hooks and dividers in shelving units
- Manual and hydraulic outrigger packages
- Pressurized Storage System (PSS)
- Workbench bumpers (bar storage or tanks), vise plates and hitches
- Interior compartment LED lighting and exterior LED flood lights
- Various safety/emergency lighting systems
- Air compressor and welding systems
- Electric-hyd. or hydraulic cranes (up to 90,000 ft\*lbs) and outrigger packages
- Auxiliary Power Units (APU's)

## Body Weight:


- 11-ft (84CA) 62" tall (w/step bumper) . . . . . 3793 lbs
- 11-ft (84CA) 62" tall (w/workbench bumper) . . . . . 4088 lbs
- 14-ft (120CA) 62" tall (w/step bumper) . . . . . 4281 lbs
- 14-ft (120CA) 62" tall (w/workbench bumper) . . . . . 4576 lbs

## Angle of Departure:

- 18.7° Service body w/ step bumper
- 15.2° Service body w/ 20" workbench bumper
- 16.4° Service body w/ 26" workbench bumper

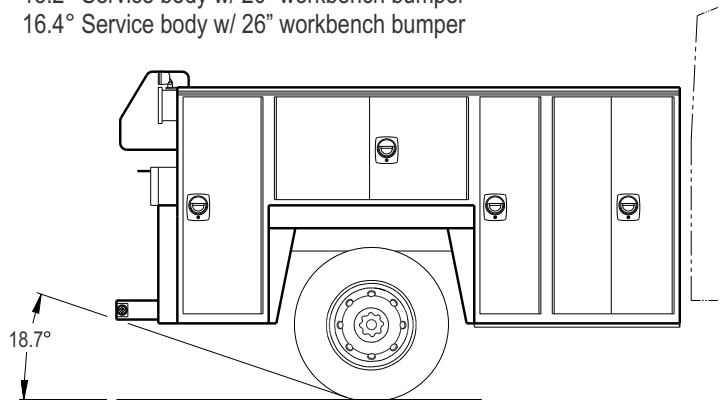

DISTRIBUTED BY:



*Crafting a Legacy of Premium Truck Bodies*

1701 2ND AVENUE  
P.O. BOX 349  
SHELDON, IA 51201

www.maintainer.com | 800-831-8588

SCAN AND VISIT OUR WEBSITE

