

H14025 CRANE

AVAILABLE IN SHORT AND TALL TOWER CONFIGURATIONS



MODEL	TYPE	Crane Rating (ft*lb)	REACH	Max Lift (lbs)	BOOM ELEVATION
H14025	Hydraulic	90,000	25'	14,000	-13° +78°

Maintainer

800-831-8588 | www.maintainer.com

specifications



- 14,000 lb. max. capacity
- 90,000 ft*lb capacity
- 25' hydraulic reach
- 615° of rotation
- 2466 lbs. (998 KGS)
- Total operational range 91° (-13 to +78)
- 140' of 7/16" diameter wire rope
- 22" x 24" Mounting Space Required
- Mounting requires (8) 7/8-9 (GRD-8) bolts
- Hydraulic Requirements: 10-12 GPM@3000 PSI

options

- Boom tip LED flood lights
- Boom tip Umbrella Mounts
- Open-center hydraulic system
- Advanced Crane Control 2.2

H14025 CRANE CAPACITY CHART


90,000 FT*LB
CRANE RATING

HYDRAULIC
EXTENSION TO 24' 9"

MAX SINGLE LINE CAPACITY IS 7000 LBS (3175 KG)
FOR GREATER LOADS USE 2 PART LINE
OUTRIGGERS MUST BE EXTENDED AND DOWN

CAPACITIES ARE IN LBS. (*KGS.)

DEDUCT FROM CAPACITIES
THE WEIGHTS OF LOAD
HANDLING DEVICES

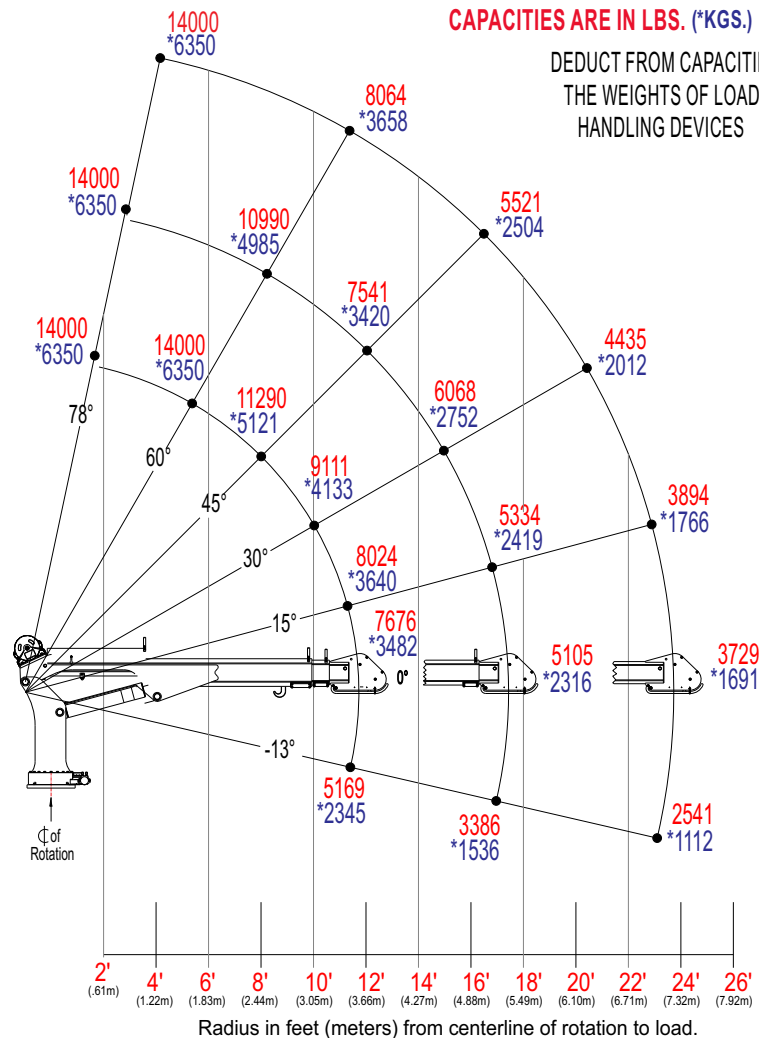

features

- Advanced Crane Control 2.1 - standard
- Tall and Short Tower Configurations
- Wireless Remote Control - standard
- Hexagonal Boom
- Dual Part Line (Single Part Capable)
- User-friendly Load Block storage
- Live weight display on remote
- Boom-mounted planetary winch
- Double Sheave Design
- Closed-center/Load-sensing Hydraulic System
- OSHA 1910.180 / ANSI B30.5 Compliant

www.

Taintainer.com

H10025 7-21

SCAN & VISIT
OUR WEBSITE

